

## Features

- Programmable output voltage to 36 volts
- Sink current capability of 1.0mA to 100mA
- Low dynamic impedance 0.15Ω typical
- Temperature compensated for operation over full rated operating temperature
- Equivalent full-range temperature coefficient of 50ppm/°C (Typical)
- Low output Noise voltage
- Voltage reference tolerance : ±0.5% (Ta=25°C)


## Ordering Information

Type NO.	Marking	Package Code
SL431xSF	43□	SOT-23F


□: Grade => B : ±0.5%, A : ±1.0%

## Outline Dimensions


unit : mm

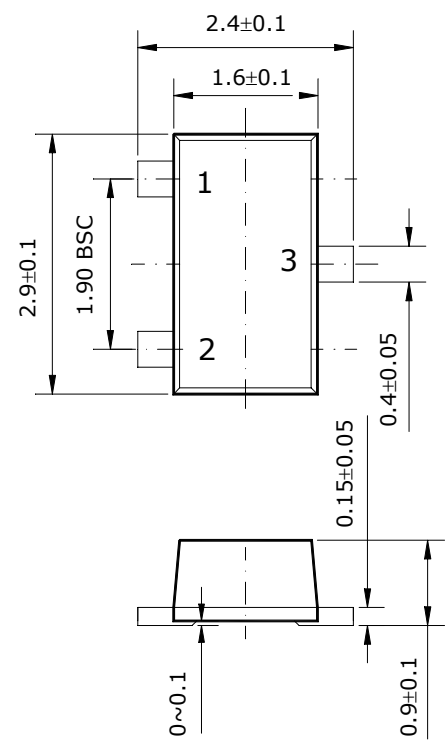

### Symbol



### Functional block diagram

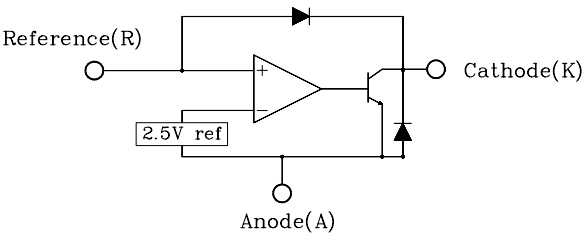

**PIN Connections**

1. Cathode
2. Reference
3. Anode