

MJL3281A (NPN) MJL1302A (PNP)

Complementary Bipolar Power Transistors

Features

- Exceptional Safe Operating Area
- NPN/PNP Gain Matching within 10% from 50 mA to 5 A
- Excellent Gain Linearity
- High BVCEO
- High Frequency
- These Devices are Pb-Free and are RoHS Compliant*

Benefits

- Reliable Performance at Higher Powers
- Symmetrical Characteristics in Complementary Configurations
- Accurate Reproduction of Input Signal
- Greater Dynamic Range
- High Amplifier Bandwidth

Applications

- High-End Consumer Audio Products
 - ◆ Home Amplifiers
 - ◆ Home Receivers
- Professional Audio Amplifiers
 - ◆ Theater and Stadium Sound Systems
 - ◆ Public Address Systems (PAs)

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CE0}	260	Vdc
Collector-Base Voltage	V_{CB0}	260	Vdc
Emitter-Base Voltage	V_{EB0}	5.0	Vdc
Collector-Emitter Voltage - 1.5 V	V_{CEX}	260	Vdc
Collector Current - Continuous	I_C	15	Adc
Collector Current - Peak (Note 1)	I_{CM}	25	Adc
Base Current - Continuous	I_B	1.5	Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate Above 25°C	P_D	200 1.43	Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.625	$^\circ\text{C}/\text{W}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.


1. Pulse Test: Pulse Width = 5 ms, Duty Cycle < 10%.




ON Semiconductor®

<http://onsemi.com>

**15 AMPERES
COMPLEMENTARY
SILICON POWER
TRANSISTORS
260 VOLTS
200 WATTS**

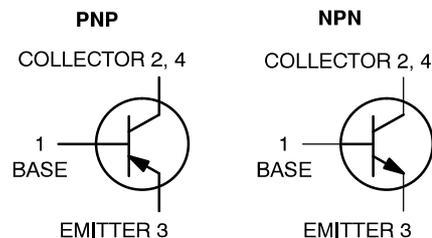

MARKING DIAGRAM

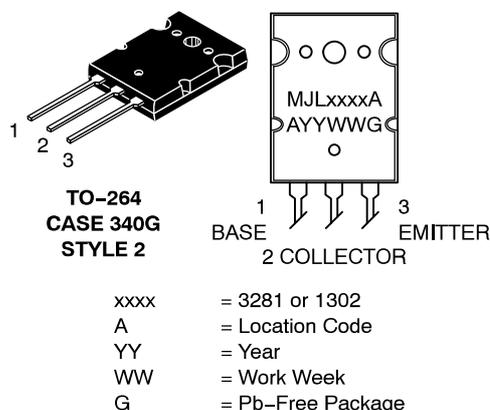

ORDERING INFORMATION

Device	Package	Shipping
MJL3281AG	TO-264 (Pb-Free)	25 Units/Rail
MJL1302AG	TO-264 (Pb-Free)	25 Units/Rail

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.