



Thick Film Hybrid Integrated Circuit
100W MIN AF POWER AMP. OUTPUT STAGE (DPP)

Features

- Dual supplies, 1 channel
- 3-stage Darlington configuration (Symmetrical complementary circuit)
- Metal substrate makes good thermal stability because of built-in temperature compensator.
- 100W min AF power amp. output stage (DPP) for very low distortion
- Pins arranged in one direction enables standardization of external printed circuit board.

Maximum Ratings/ $T_a = 25^{\circ}\text{C}$

Maximum Ratings/ $T_a = 25^\circ\text{C}$		unit
Maximum supply voltage	$V_{CC\text{ max}}$	± 75 V
Thermal resistance	θ_{j-c}	1.0 $^\circ\text{C/W}$
Collector current	I_C	15 A
Junction temperature	T_j	150 $^\circ\text{C}$
Storage temperature	T_{stg}	$-30 \sim +105$ $^\circ\text{C}$



Recommended Operating Conditions/ $T_a = 25^{\circ}\text{C}$

Recommended Operating Conditions/ $T_a = 25^{\circ}\text{C}$			unit
Recommended supply voltage	V_{CC}	± 52	V
Load resistance	R_L	8	Ω

Operating Characteristics/ $T_a = 25^{\circ}\text{C}$, $V_{CC} = \pm 52\text{V}$, $R_L = 8\Omega$, $R_g = 600\Omega$, $V_G = 36.7\text{dB}$, at specified test circuit (based on Sample Application Circuit)

			min	typ	max	unit
Quiescent current	I_{CCO}	$V_{CC} = \pm 60V$	20	40	70	mA
Output power	P_O	THD = 0.01%, $f = 20Hz \sim 20kHz$	100			W
Total harmonic distortion	THD(1)	$P_O = 100W, f = 20Hz \sim 20kHz$		0.005	0.01	%
	THD(2)	$P_O = 1W, f = 20Hz \sim 20kHz$			0.01	%
Power bandwidth	PBW	$P_O = 50W, f = 50kHz$		0.05		%

Equivalent Circuit

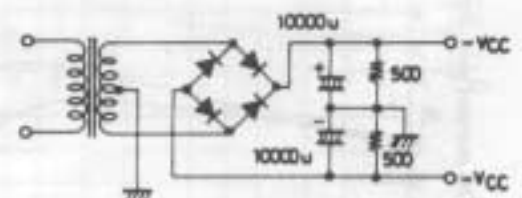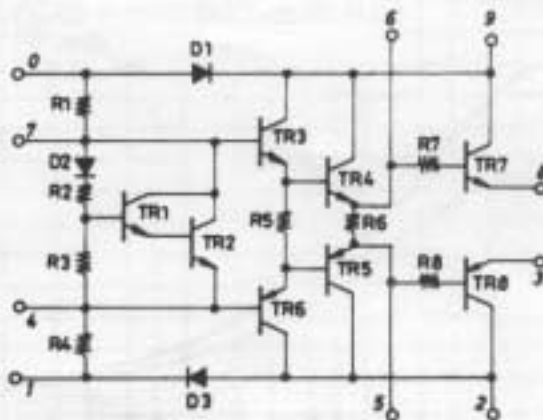

Specified Transformer Power Supply
(Equivalent to Tango MG-200)

Case Outline 4007
(unit: mm)

