



LOW-NOISE VERTICAL DEFLECTION SYSTEM

FEATURES SUMMARY

- COMPLETE VERTICAL DEFLECTION SYSTEM
- LOW NOISE
- SUITABLE FOR HIGH DEFINITION MONITORS
- ESD PROTECTED

DESCRIPTION

The TDA1175P is a monolithic integrated circuit in POWERDIP16 plastic package. It is intended for use in black and white and colour TV receivers. Low-noise makes this device particularly suitable for use in monitors.

The functions incorporated are: synchronization circuit, oscillator and ramp generator, high power gain amplifier, flyback generator, voltage regulator.

Figure 1. Package


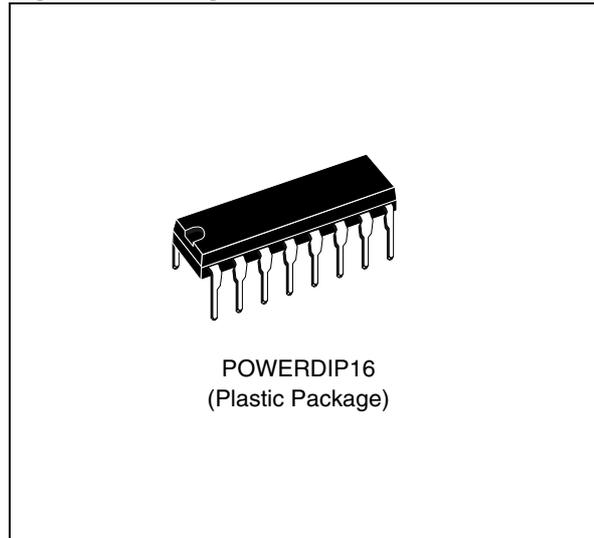


Figure 2. Pin Connections

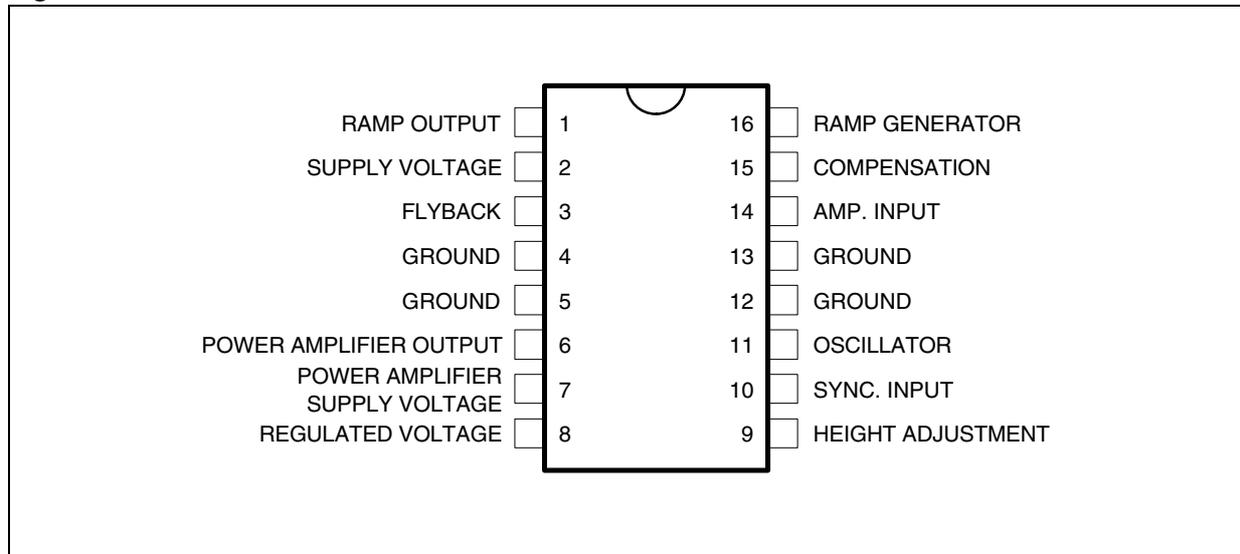

TDA1175P

Figure 3. Block Diagram

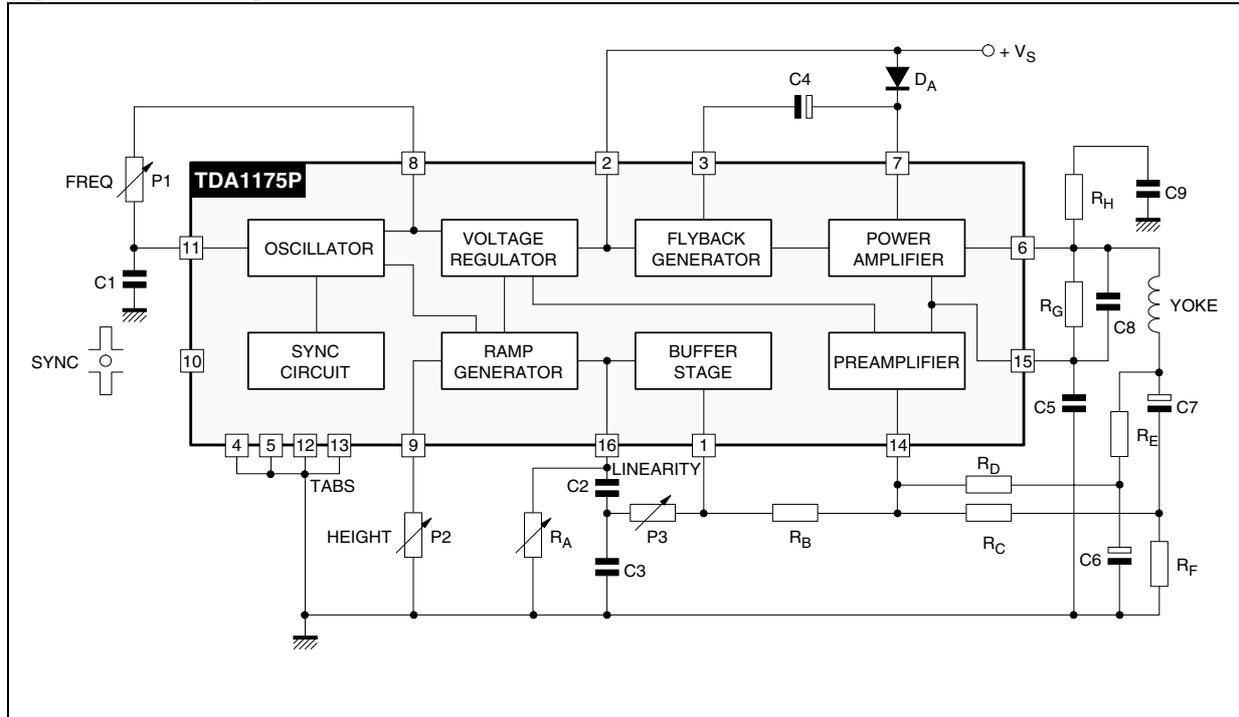


Table 1. Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V_S	Supply Voltage at Pin 2	35	V
V_6, V_7	Flyback Peak Voltage	60	V
V_{14}	Power Amplifier Input Voltage	+ 10 - 0.5	V
I_o	Output Peak Current (non repetitive) at $t = 2\text{ms}$	2	A
I_o	Output Peak Current at $f = 50\text{Hz}, t \leq 10\mu\text{s}$	2.5	A
I_o	Output Peak Current at $f = 50\text{Hz}, t > 10\mu\text{s}$	1.5	A
I_3	Pin 3 DC Current at $V_6 < V_2$	100	mA
I_3	Pin 3 Peak to Peak Flyback Current for $f = 50\text{Hz}, t_{fly} \leq 1.5\text{ms}$	1.8	A
I_{10}	Pin 10 Current	± 20	mA
P_{TOT}	Power Dissipation at $T_{tab} = 90^\circ\text{C}$	4.3	W
	Power Dissipation at $T_{amb} = 70^\circ\text{C}$ (free air) (1)	1	W
T_{STG}, T_j	Storage and Junction Temperature	- 40 to 150	$^\circ\text{C}$

Table 2. Thermal Data

Symbol	Parameter	Value	Unit
$R_{th(j-tab)}$	Thermal Resistance Junction-pin Max.	12	$^\circ\text{C/W}$
$R_{th(j-amb)}$	Thermal Resistance Junction-ambient Max.	80	$^\circ\text{C/W}^{(1)}$

Note: 1. Obtained with tabs soldered to printed circuit with minimized copper area.

ELECTRICAL CHARACTERISTICS(T_{amb} = 25°C, unless otherwise specified)**Table 3. DC CHARACTERISTICS**(Refer to the test circuits, V_S = 35V)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit	Fig.
I ₂	Pin 2 Quiescent Current	I ₃ = 0		7	14	mA	5
I ₇	Pin 7 Quiescent Current	I ₆ = 0		8	17	mA	5
-I ₁₁	Oscillator Bias Current	V ₁₁ = 1V		0.1	1	μA	4
-I ₁₄	Amplifier Input Bias Current	V ₁₄ = 1V		1	10	μA	5
-I ₁₆	Ramp Generator Bias Current	V ₁₆ = 0		0.02	0.3	μA	4
-I ₁₆	Ramp Generator Current	I ₉ = 20μA, V ₁₆ = 0	18.5	20	21.5	μA	5
$\frac{\Delta I_{16}}{I_{16}}$	Ramp Generator Non-linearity	ΔV ₁₆ = 0 to 12V, I ₉ = 20μA		0.2	1	%	5
V _S	Supply Voltage Range		10		35	V	
V ₁	Pin 1 Saturation Voltage to Ground	I ₁ = 1mA		1	14	V	
V ₃	Pin 3 Saturation Voltage to Ground	I ₃ = 10mA		1.5	2.5	V	4
V ₆	Quiescent output Voltage	V _s = 10V, R1 = 1kΩ, R2 = 1kΩ V _s = 35V, R1 = 3kΩ, R2 = 1kΩ	4.1 8.2	4.4 8.8	4.7 9.4	V V	4 4
V _{6L}	Output Saturation Voltage to Ground	- I ₆ = 0.1A - I ₆ = 0.8A		0.9 1.8	1.2 2.2	V V	6 6
V _{6H}	Output Saturation Voltage to Supply	I ₆ = 0.1A I ₆ = 0.8A		1.4 2.8	2.1 3.1	V V	7 7
V ₈	Regulated Voltage at Pin 8		6.5	6.7	6.9	V	5
V ₉	Regulated Voltage at Pin 9	I ₉ = 20μA	6.6	6.8	7	V	5
$\frac{ \Delta V_8 }{\Delta V_S} \quad \frac{ \Delta V_9 }{\Delta V_S}$	Regulated Voltage Drift with Supply Voltage	ΔV _s = 10 to 35V		1	2	mV/V	5
V ₁₄	Amplifier Input Reference Voltage	V ₁₀ ≤ 0.4V	2.20	2.27	2.35	V	

Table 4. AC CHARACTERISTICS(Refer to the AC test circuit, $V_S = 22V$, $f = 50Hz$)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit	Fig.
I_S	Supply Current	$I_Y = 1_{APP}$		140		mA	8
I_{10}	Sync. Input Current (positive or negative)		0.5		2	mA	8
V_6	Flyback Voltage	$I_Y = 1_{APP}$		45		V	8
t_{fly}	Flyback Time	$I_Y = 1_{APP}$		0.7		ms	8
V_{ON}	Peak to Peak Output Noise	Pin 11 Connected to GND		18	30	mV _{pp}	8
f_0	Free Running Frequency	(P1 + R1) = 300k Ω C9 = 0.1 μ F	36	43.5		Hz	8
f_{OPER}	Operating Frequency Range		10		120	Hz	8
Δf	Synchronization Range	$I_{10} = 0.5mA$, C9 = 0.1 μ F (P1+R1) = 300k Ω	14			Hz	8
$\frac{\Delta f}{\Delta V_S}$	Frequency Drift with Supply Voltage	$V_S = 10$ to 35V		0.00 5		Hz/V	8
$\frac{ \Delta f }{\Delta T_{ab}}$	Frequency Drift with tab Temperature	$T_{tab} = 40$ to 120 $^{\circ}C$		0.01		Hz/ $^{\circ}C$	8