

High h_{FE}
Low $V_{CE(sat)}$

2SC3852/3852A

Silicon NPN Epitaxial Planar Transistor

Application : Driver for Solenoid and Motor, Series Regulator and General Purpose

Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Symbol	2SC3852	2SC3852A	Unit
V_{CBO}	80	100	V
V_{CEO}	60	80	V
V_{EBO}	6		V
I_C	3		A
I_B	1		A
P_C	25($T_c=25^\circ\text{C}$)		W
T_j	150		$^\circ\text{C}$
T_{stg}	-55 to +150		$^\circ\text{C}$


Electrical Characteristics ($T_a=25^\circ\text{C}$)

Symbol	Conditions	2SC3852	2SC3852A	Unit
I_{CBO}	$V_{CB} =$	10max		μA
$V_{CE(sat)}$	$V_{EB}=6\text{V}$	80	100	V
I_{EBO}		100max		μA
$V_{(BR)CEO}$	$I_C=25\text{mA}$	60min	80min	V
h_{FE}	$V_{CE}=4\text{V}$, $I_C=0.5\text{A}$	500min		
$V_{CE(sat)}$	$I_C=2\text{A}$, $I_E=50\text{mA}$	0.5max		V
f_T	$V_{CE}=12\text{V}$, $I_E=-0.2\text{A}$	15typ		MHz
COB	$V_{CB}=10\text{V}$, $f=1\text{MHz}$	50typ		pF


Typical Switching Characteristics (Common Emitter)

V_{CC} (V)	R_L (Ω)	I_C (A)	V_{BB1} (V)	V_{BB2} (V)	I_{B1} (mA)	I_{B2} (mA)	t_{on} (μs)	t_{stg} (μs)	t_f (μs)
20	20	1.0	10	-5	15	-30	0.8typ	3.0typ	1.2typ


External Dimensions FM20(TO220F)

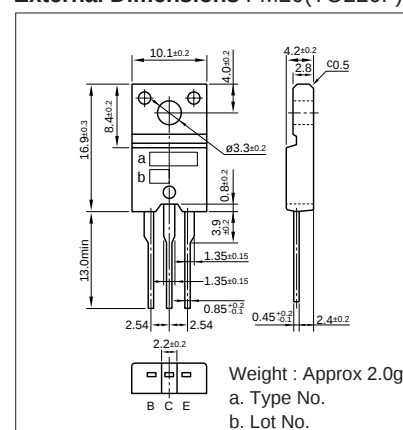


I_C-V_{CE} Characteristics (Typical)

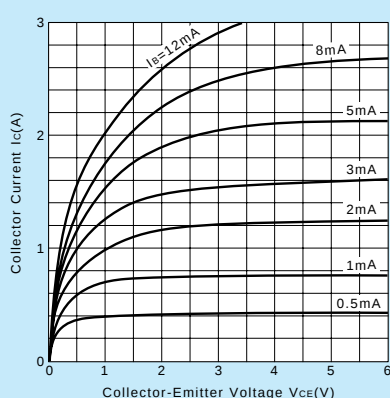


$V_{CE(sat)}-I_B$ Characteristics (Typical)

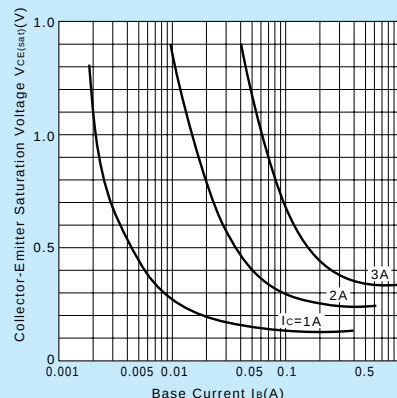


I_C-V_{BE} Temperature Characteristics (Typical)

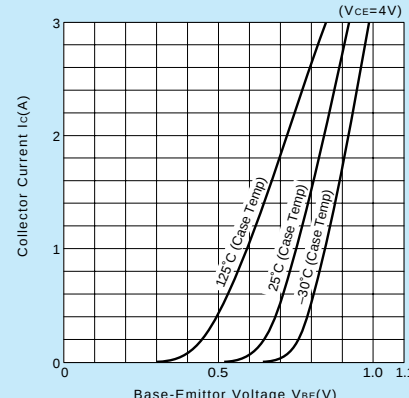


$h_{FE}-I_C$ Characteristics (Typical)

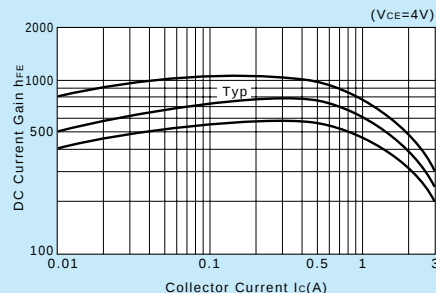


$h_{FE}-I_C$ Temperature Characteristics (Typical)

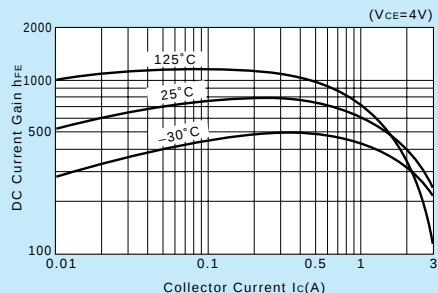


$\theta_{j-a}-t$ Characteristics

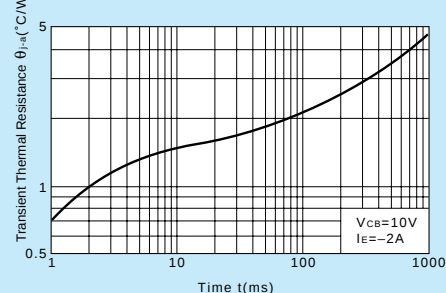

f_T-I_E Characteristics (Typical)

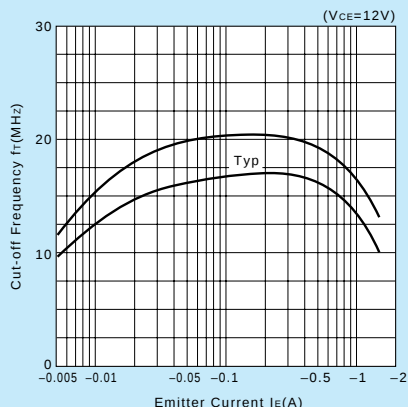

Safe Operating Area (Single Pulse)

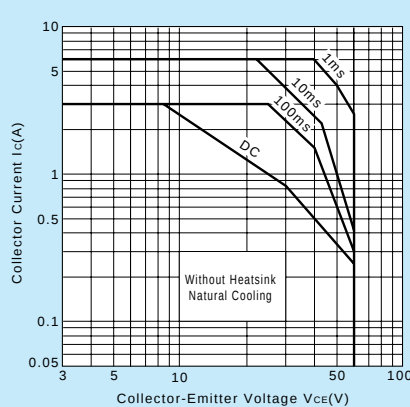

P_C-T_a Derating

