

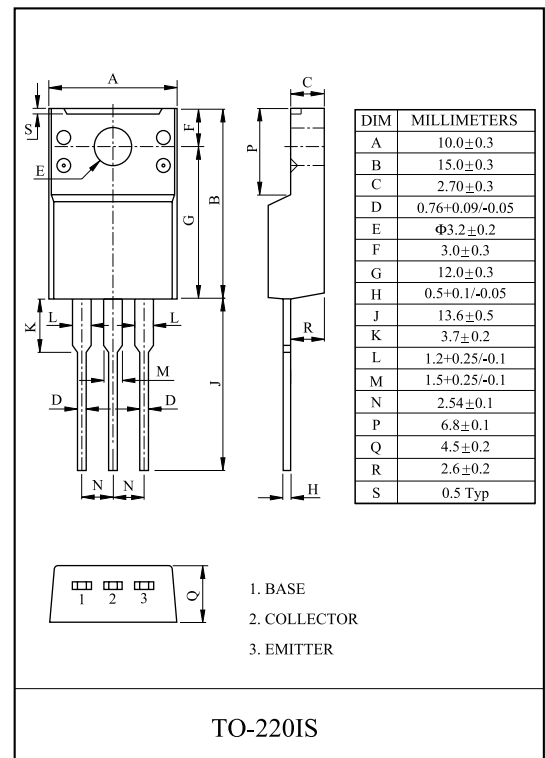
INDUSTRIAL USE.
GENERAL PURPOSE APPLICATION.

FEATURES

- Low Collector Saturation Voltage
: $V_{CE(sat)} = -1.0V(\text{Max.})$ at $I_C = -2A$, $I_B = -0.2A$.
- Complementary to KTC2026.

MAXIMUM RATING ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-60	V
Collector-Emitter Voltage	V_{CEO}	-60	V
Emitter-Base Voltage	V_{EBO}	-7	V
Collector Current	I_C	-3	A
Base Current	I_B	-0.5	A
Collector Power Dissipation	$T_a = 25$	P_C	W
	$T_c = 25$		
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = -60V$, $I_E = 0$	-	-	-1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -7V$, $I_C = 0$	-	-	-1	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -50mA$, $I_B = 0$	-60	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE} = -5V$, $I_C = -0.5A$	100	-	300	
	$h_{FE(2)}$	$V_{CE} = -5V$, $I_C = -3A$	20	-	-	
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -2A$, $I_B = -0.2A$	-	-0.25	-1.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -5V$, $I_C = -0.5A$	-	-0.7	-1.0	V
Transition Frequency	f_T	$V_{CE} = -5V$, $I_C = -0.5A$	-	30	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V$, $I_E = 0$, $f = 1MHz$	-	45	-	pF
Switching Time	Turn-on Time	$-I_{B1} = -I_{B2} = 0.2A$ DUTY CYCLE $\leq 1\%$	-	0.4	-	μs
	Storage Time		-	1.7	-	
	Fall Time		-	0.5	-	

Note : $h_{FE(1)}$ Classification Y:100 200, GR:150 300

